



AVC-BNN81AVT/V2 AI

NDAA COMPLIANT | CE | FC


8MP H.265 NETWORK IR WATER-PROOF BULLET CAMERA

OVERVIEW

- 8MP (3840 x 2160) @30fps
- Max. Resolution: 3840 x 2160
- Supports Smart H.265/H.264 Encoding
- True Day & Night ICR
- Up to 230 ft. of IR Illumination
- Motorized zoom 2.8~12mm Lens
- 3D DNR, True WDR, HLC, BLC and ROI Encoding
- Supports Triple Streams
- Supports Audio and Alarm Input/Output
- Supports CVBS Output
- Optional P2P Function
- Built-in micro SD card slot with video and still image capture function (up to 256GB)
- Intelligent Analytics
- Supports Remote Access with Windows, macOS, iOS and Android
- IP67 Ingress Protection
- Operating Temperature: -22°F - 140°F (-30° - 60° C)
- DC12V / PoE (802.3af)
- NDAA Compliant

DIMENSIONS

Unit : inch(mm)

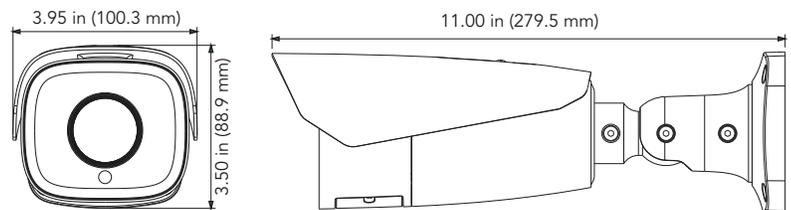

OPTIONAL ACCESSORIES



AVM-EDMTS-W-TL1



AVM-P-CMT



AVM-P-PMT

SPECIFICATIONS

CAMERA					
Image Sensor	1 / 2.8" Progressive Scan CMOS				
Image Size	3840 x 2160				
Shutter Speed	1/3s to 1/100,000s				
Iris Type	Fixed Iris				
Min. Illumination	Color: 0.015 lux @ F1.4(AGC ON); BW: 0 lux with IR				
IR Distance	Up to 229ft				
Lens	Motorized 2.8~12mm @ F1.4 Horizontal FoV: 97° ~ 32° Vertical FoV: 57° ~ 18° Diagonal FoV: 115° ~ 36°				
Lens Mount	Ø14				
Day & Night	ICR				
Wide Dynamic Range	120dB				
Digital NR	3D DNR				
Backlight Compensation (BLC)	Yes				
Highlight Compensation (HLC)	Yes				
Defog	Yes				
S/N Ratio	≥50dB				
EIS	Yes				
Angle Adjustment	Pan: 0°~360° ; Tilt: 0°~90° ; Rotation:0°~360°				
VIDEO STREAM					
Video Compression	Main stream: H.265+ / H.265 / H.264+ / H.264 Sub/third stream: H.265+ / H.265 / H.264+ / H.264 / MJPEG				
H.264 Compression Standard	Baseline Profile / Main Profile / High Profile				
Resolution	8MP (3840 × 2160), 6MP (3072 × 2048), 5MP (2592 × 1944), 4MP (2592 × 1520), 2K (2560 × 1440), 3MP (2304 × 1296), 1080P (1920 × 1080), 720P (1280 × 720), D1, CIF, 480 × 240, VGA (640 × 480)				
Main Stream	60Hz: 8MP/6MP/5MP/4MP/2K/3MP/1080P/720P (1~30fps); 50Hz: 8MP/6MP/5MP/4MP/2K/3MP/1080P/720P (1~25fps); HFR mode: 1080P/720P (60Hz: 1~60fps / 50Hz: 1~50fps)				
Sub Stream	60Hz: 720P/D1/CIF/VGA/480x240 (1~30fps); 50Hz: 720P/D1/CIF/VGA/480x240 (1~25fps)				
Third Stream	60Hz: 720P/D1/480x240/CIF (1~30fps); 50Hz: 720P/D1/480x240/CIF (1~25fps)				
Video Bit Rate	64 Kbps ~ 12 Mbps (CBR / VBR Adjustable)				
Image Settings	ROI, Saturation, Brightness, Hue, Contrast, Wide Dynamic, Sharpness, Image Mirror, Image Flip, NR, etc. adjustable through client software or web browse				
ROI	Each ROI to be configured separately				
NETWORK / INTERFACE					
Network	1 x RJ45 10M / 100M Self-Adaptive Ethernet port				
Network Protocol	UDP, IPv4, IPv6, DHCP, NTP, RTSP, RTP, RTMP (v5.x firmware and above), RTCP, PPPoE, DDNS, SMTP, FTP, SNMP, HTTP, HTTP POST, 802.1x, UPnP, HTTPs, QoS				
Interface Protocol	ONVIF (Profile S, G, T, M)				
Web Browser	IE 11 (Plug-in required) / Google Chrome 89.0+ / Edge 89.0+ / Firefox 87.0+ / Safari 14.0+				
Online Connection	Support simultaneous monitoring for up to 10 users; Support multi-stream real time transmission				
Security	Video encryption, firmware encryption, HTTPS encryption, configuration encryption, illegal login lock, IP address filtering, 802.1x authentication, basic and digest authentication for HTTP/RTSP				
Storage	Micro SD/SDHC/SDXC Slot (up to 256GB) with video and still image capture function				
Video Output	CVBS output (BNC x1)				
Audio	1CH audio input; 1CH audio output				
Audio Compression	G711A / U				
Alarm	1CH alarm input; 1CH alarm output				
Hardware Reset	Yes				
DORI DISTANCE					
	Lens	Detect	Observe	Recognize	Identify
	2.8 ~ 12mm (W)	262ft (80m)	105ft (32m)	52ft (16m)	26ft (8m)
	2.8 ~ 12mm (T)	896ft (273m)	358ft (109m)	180ft (55m)	89ft (27m)
FUNCTIONS					
Remote Monitoring	Web Browser Interface, Mobile App, AVYCON CVMS 2.0				
Smart Alarm	Motion detection; sensor alarm, SD card error; SD card full, IP address conflict, cable disconnection				
Smart Analytics	Line crossing, region intrusion/entrance/exiting, loitering detection, illegal parking detection, abandoned/missing object detection, Target counting by line/intrusion area/heat map, exception detection, face detection and face capture				
Video Metadata	Simultaneously captures human body, motor vehicle and non-motor vehicle and extracts 13 human features, 5 motor vehicle features and 1 non-motor vehicle feature				
General Function	Watermark, video mask, heartbeat, image distortion correction, corridor pattern				
GENERAL					
Power Supply	DC12V / PoE (IEEE 802.3af)				
Power Consumption	<12W				
Operating Environment	-22°F ~ 140°F (-30°C ~ 60°C) Humidity: less than 95% (non-condensing)				
Storage Environment	-22°F ~ 149°F (-30°C ~ 65°C) Humidity: less than 95% (non-condensing)				
Dimensions (in)	10.96 x 3.94 x 3.49				
Weight (lb)	Approx. 2.29 lbs				
Ingress Protection	IP67				
Certificate	CE, FCC				
Installation	Ceiling mounting; Wall mounting				
Environmental Protection	Complies with Directive EU RoHS, WEEE(2012/19/EU), directive 94/62/EC and REACH (EC1907/2006)				