


**AVC-BNN81FT/28**  
**8MP H.265 HD AI BULLET NETWORK CAMERA**

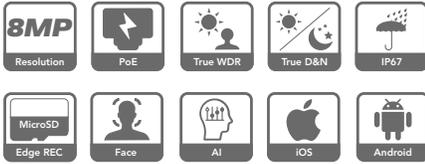

**8MP H.265 HD AI BULLET NETWORK CAMERA**

*8MP H.265 HD AI BULLET NETWORK CAMERA WITH SMART FEATURES*



The AVYCON AVC-BNN81FT/2.8 camera is an 8MP H.265 HD AI Bullet Network Camera with Smart Features. This 8MP IP camera supports True Day and Night mode, PoE, and up to 164 ft. of IR night view distance. This camera includes a Fixed 2.8mm Lens with Auto-focus capabilities that can be controlled through a DVR. The AVC- BNN81FT/2.8 features a Audio Input, a built-in microSD slot (256GB max capacity), and is ONVIF compliant. Also standard with this series is 3D Digital NR, ROI, HLC, True WDR, and BLC capabilities along with IP67 outdoor rating. Optional accessories for this camera include a Junction Box Mount, a Pole Mount Bracket, and a Corner Mount Bracket.

**FUNCTIONS**

- 8MP (3840 x 2160) @30fps
- Max. Resolution: 3840 x 2160
- Supports Smart H.265/H.265 Encoding
- True Day & Night ICR
- Up to 164 ft. IR Illumination
- Fixed 2.8mm Lens
- 3D DNR, True WDR, HLC, BLC and ROI Encoding
- Supports Triple Streams
- Supports 1 CH. Audio Input
- Optional P2P function
- Supports Remote Access with Windows, macOS, iOS and Android
- IP67 Ingress Protection
- Operating Temperature: -22°F - 140°F(-30°- 60° C)
- DC12V / PoE (802.3af)
- NDA A Compliant

**DIMENSIONS**

Unit : inch (mm)

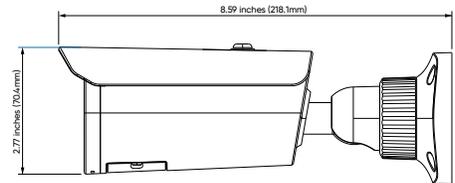

**OPTIONAL ACCESSORIES**



AVM-BDMT-W-TL1



AVM-P-CMT



AVM-P-PMT



**AVYCON**<sup>®</sup>

# AVC-BNN81FT/28

## 8MP H.265 HD AI BULLET NETWORK CAMERA

### SPECIFICATIONS

CAMERA					
Image Sensor	1 / 2.8" Progressive Scan CMOS				
Image Size	3840 x 2160				
Shutter Speed	1/3s to 1/100,000s				
Iris Type	Fixed Iris				
Min. Illumination	Color: 0.02 lux @ F1.6 (AGC ON); BW: 0 lux with IR				
IR Distance	Up to 164ft				
Lens	Fixed 2.8 @ F1.6 Horizontal FoV: 104° Vertical FoV: 55° Diagonal FoV: 125°				
Focus	Fixed				
Lens Mount	M12				
Day & Night	ICR				
Wide Dynamic Range	120dB				
Digital NR	3D DNR				
Backlight Compensation (BLC)	Yes				
Highlight Compensation (HLC)	Yes				
Defog	Yes				
S/N Ratio	≥50dB				
EIS	Yes				
Angle Adjustment	Pan: 0°~360° ; Tilt: 0°~90° ; Rotation:0°~360°				
VIDEO IMAGE					
Video Compression	Main stream: H.265+ / H.265 / H.264+ / H.264 Sub/third stream: H.265+ / H.265 / H.264+ / H.264 / MJPEG				
H.264 Compression Standard	Baseline Profile / Main Profile / High Profile				
Resolution	8MP ( 3840 × 2160 ), 6MP ( 3072 × 2048 ), 5MP ( 2592 × 1944 ), 4MP ( 2592 × 1520 ), 2K ( 2560 × 1440 ), 3MP ( 2304 × 1296 ), 1080P ( 1920 × 1080 ), 720P ( 1280 × 720 ), D1, CIF, 480 × 240, VGA ( 640 × 480 )				
Main Stream	60Hz: 8MP/6MP/5MP/4MP/2K/3MP/1080P/720P (1~30fps); 50Hz: 8MP/6MP/5MP/4MP/2K/3MP/1080P/720P (1~25fps); HFR mode: 1080P/720P (60Hz: 1~60fps / 50Hz: 1~50fps)				
Sub Stream	60Hz: 720P/D1/CIF/VGA/480x240 (1~30fps); 50Hz: 720P/D1/CIF/VGA/480x240 (1~25fps)				
Third Stream	60Hz: 720P/D1/480x240/CIF (1~30fps); 50Hz: 720P/D1/480x240/CIF (1~25fps)				
Video Bit Rate	64 Kbps ~ 12 Mbps (CBR / VBR Adjustable)				
Image Settings	ROI, Saturation, Brightness, Hue, Contrast, Wide Dynamic, Sharpness, Image Mirror, Image Flip, NR, etc. adjustable through client software or web browser				
ROI	Each ROI to be configured separately				
NETWORK / INTERFACE					
Network	1 x RJ45 10M / 100M Self-Adaptive Ethernet port				
Network Protocol	UDP, IPv4, IPv6, DHCP, NTP, RTSP, RTP, RTCP, PPPoE, DDNS, SMTP, FTP, SNMP, HTTP, HTTP POST, 802.1x, UPnP, HTTPs, QoS, RTMP (v5.x firmware and above)				
Interface Protocol	ONVIF (Profile S, G, T, M)				
Web Browser	IE 11 (Plug-in required) / Google Chrome 89.0+ / Edge 89.0+ / Firefox 87.0+ / Safari 14.0+				
Online Connection	Support simultaneous monitoring for up to 10 users; Support multi-stream real time transmission				
Security	Video encryption, firmware encryption, HTTPS encryption, configuration encryption, illegal login lock, IP address filtering, 802.1x authentication, basic and digest authentication for HTTP/RTSP				
Storage	Network remote storage; micro SD card storage (up to 256GB)				
Video Output	No				
Audio	1CH audio input				
Audio Compression	G711A / U				
Alarm	No				
Hardware Reset	Yes				
DORI DISTANCE					
	Lens	Detect	Observe	Recognize	Identify
	2.8mm	272ft (83m)	108ft (33m)	56ft (17m)	26ft (8m)
FUNCTIONS					
Remote Monitoring	Web Browser Interface, Mobile App, AVYCON CVMS 2.0				
Smart Alarm	Motion detection, SD card error, SD card full, IP address conflict, cable disconnection				
Smart Analytics	Line crossing, region intrusion/entrance/exiting, loitering detection, illegal parking detection, abandoned/missing object detection, Target counting by line/intrusion area/heat map, exception detection, face detection and face capture				
Video Metadata	Simultaneously captures human body, motor vehicle and non-motor vehicle and extracts 13 human features, 5 motor vehicle features and 1 non-motor vehicle feature				
General Function	Watermark, video mask, heartbeat, image distortion correction, corridor pattern				
GENERAL					
Power Supply	DC12V / PoE (IEEE802.3af)				
Power Consumption	<9W				
Operating Environment	-22°F ~ 140°F (-30°C ~ 60°C) Humidity: less than 95% (non-condensing)				
Storage Environment	-22°F ~ 149°F (-30°C ~ 65°C) Humidity: less than 95% (non-condensing)				
Dimensions (in)	8.57 x 3.17 x 3.16				
Weight (lb)	Approx. 1.49 lbs				
Ingress Protection	IP67				
Certification	CE, FCC				
Installation	Ceiling mounting; Wall mounting				
Environmental Protection	Complies with Directive EU RoHS, WEEE(2012/19/EU), directive 94/62/EC and REACH (EC1907/2006)				



Copyright © AVYCON. All rights reserved. Specifications and pricing are subject to change without notice.

phone: 949-752-7606  
 email: info@avycon.com  
 social: @avycon\_aivo  
 website: avycon.com