




# AVC-NBE81F28 AI

NDA  
COMPLIANT | CE | FC

8MP DUAL LIGHT TURRET NETWORK CAMERA

## DIMENSIONS

Unit : inch(mm)

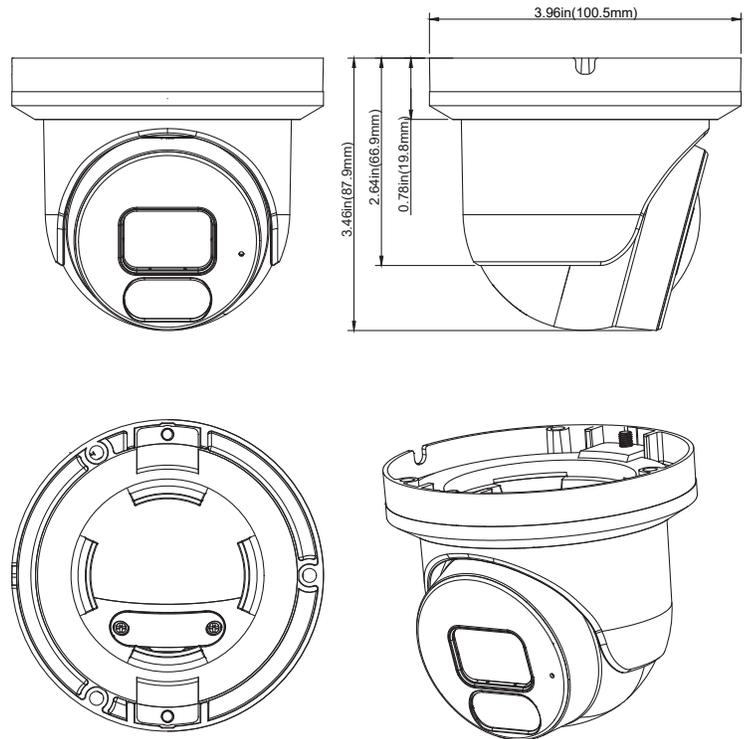

## OVERVIEW

- 8MP (3840x2160) @15fps H.265/ H.264
- Full Color / IR Mode
- 2.8mm Fixed Lens (F1.6)
- 3D DNR, D-WDR
- Dual Light: White Light LED / Infrared LED
- Built-in MIC
- Built-in Micro SD card slot (up to 512GB)
- AI Feature : Intrusion Detection, Tripwire Detection, Loitering Detection, Region Entrance / Exiting Detection
- IP67 ingress protection
- PoE / DC12V Power supply
- Support remote monitoring by AVYCON ONE (Mobile APP) and AVYCON CMSONE (CMS)

## OPTIONAL ACCESSORIES



AVM-JB-BE-AD2  
JUNCTION BOX



AVM-JB-BE-S2  
JUNCTION BOX



AVM-CWM-EV-S2  
COMPACT  
WALL MOUNT



AVM-HWM-E-S2  
WALL MOUNT  
WITH JUNCTION BOX



AVM-HCM-E-S2  
CEILING MOUNT  
WITH JUNCTION BOX



AVM-JB-DUAL-US1  
DUAL JUNCTION BOX



AVM-P-POM-A2  
POLE  
MOUNT BRACKET



AVM-CRM-A1  
CORNER  
MOUNT BRACKET

## SPECIFICATIONS

VIDEO	
Imaging Device	1/2.7"
Effective Pixels	8MP 3840(H)×2160(V)
Scanning System	Progressive CMOS
Min. Illumination	Color 0.009lux @ F1.6 (AGC ON) ; B/W 0 lux @ IR ON
LENS TYPE	
Focal Length (Zoom Ratio)	2.8mm Fixed
Max. Aperture Ratio	F No. 1.6
Angular Field of View	Horizontal: 110°, Vertical: 58°, Diagonal: 133°
Min. Object Distance	6.56ft(2m)
Lens Type	Fixed(M12)
OPERATIONAL	
IR LED	1
White Light	2
IR Viewable Length	Up to 82ft(25m)
White Light Viewable Length	Up to 65ft(20m)
Type of Complementary Light	Default white light, switchable infrared light
Motion Detection	Smart Motion Detection (Pedestrian & Vehicle Detection)
Wide Dynamic Range	DWDR
Digital Noise Reduction	3D DNR
Day & Night	Full Color (default) / Day&Night / Smart Illumination
White Balance	Auto/Manual
Electronic Shutter Speed	1/5 ~ 1/20000s
Edge Storage	Micro SD/SDHC/SDXC Slot (512GB)
Alarm I/O	N/A
Audio I/O	Built-in MIC
Hardware Reset	Yes
Smart Feature	Intrusion Detection (ID), Tripwire Detection (TD), Loitering Detection (LD), Region Entrance / Exiting Detection
NETWORK	
Ethernet	RJ45(10/100BASE-T)
Video Compression Format	H.265/H.264
Resolution	Main Stream@15fps : 8MP(3840x2160) Sub Stream@15fps : 1080P(1920x1080)
Video Quality Adjustment	512Kbps ~ 6Mbps
Bitrate Control Method	CBR/VBR
IP	IPv4
Protocol	TCP/IP, HTTP, DHCP, DNS, DDNS, RTP/RTSP,SMTP, NTP, HTTPS
Application Programming Interface	ONVIF, REST API
Web Viewer	IE10/11
ENVIRONMENTAL	
Operating Conditions	-31~140F(-35~+60°C/less than < 90% RH
Ingress Protection	IP67
ELECTRICAL	
Input Voltage / Current	D12V/PoE(IEEE802.3af)
Power Consumption	DC12V: max 5.6W ; PoE(48V): max 7.2W
MECHANICAL	
Material	Metal
Dimensions (HxWxD)	3.96 x 3.46in (100.5 x 87.9mm)
Weight	0.92lbs (420.1g)