

AVS-IPHS30WM

CE | FC 30W Smart All-in-One IP Horn Speaker with a Built-in Microphone



OVERVIEW

- Two-Way Intercom Communication
- 48K OPUS, AEC, AGC, ANR
- Compatible with VoIP, SIP devices (IPPBX, IP Phone) via SIP
- Compatible with IP Camera VMS via ONVIF
- HTTP Control, Alarm in, Schedule
- 30W Amplifier, PoE Power Supply
- Built-in MIC, Audio in, TF Card (Optional)

OPTIONAL ACCESSORIES



AVN-PO-SPTXT-1T2
PoE Splitter /
Extender





AVN-PI-IJT30G
30W PoE
Injector



AVN-PJ-IJT60G
60W PoE
Injector

DIMENSIONS

Unit : inch(mm)

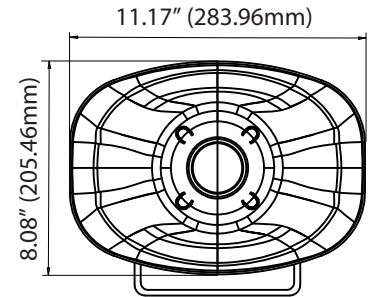

SPECIFICATIONS

AUDIO	
Codec	OPUS 48 kHz, MP3 44.1 kHz, G.722 ADPCM 16 kHz, G.711 PCMU 8 kHz, G.711 PCMA 8 kHz
Built-in Microphone	Yes
SPEAKER	
Max SPL	120dB
Frequency Response	350Hz~8KHz
Frequency Range	500-2KHZ +-10dB 400-12KHZ +-20dB
Harmonic Distortion	0.1@1kHz
Signal to Noise Ratio	91dB
NETWORK	
Security	Password protection, IP address filtering, Digest authentication, User access log, Firewall
Network Protocol	SIP, ONVIF, HTTP, IPv4, DHCP, RTSP, RTP, RTCP, TCP, UDP, ARP, FTP, TFTP, NFS, NTP
Network Interface	10/100 Base-TX, RJ45
VoIP	Support for SIP protocol for intergration with VoIP systems, intergrated with SIP/PBX 2 SIP Accounts, SIP Direct IP Call, RTP Multicast Codec: OPUS, MP3, G.722, PCMU, PCMA
AMPLIFIER	
Amplifier Description	Built-in 30W Amplifier
GENERAL	
Operating Temperature	-22°F ~ +140°F (-30°C ~ +60°C)
Operating Humility	5%-85%
Material	ABS (IP66 water-proof)
Rate Power	30W
Power Supply	PoE or DC12V/24V
Connector	Alarm in, Audio in, DC Power, PoE, TF Card (Optional)
Installation	Wall Mounted
Dimensions	11.23 x 8.08 x 11.17 in (285.40 x 205.46 x 283.96 mm)
Net Weight	4.4 lbs (2 KG)
Languages	English
Warranty	2 years
Package Includes	IP Horn Speaker User Manual