

# AVC-VN91VLT

2 MEGAPIXEL IR VANDAL DOME CAMERA

IP  
CAMERA




## FUNCTION

- 1080P (1920 x 1080) Full Real Time Coding
- Max. Resolution: 1920 x 1080
- 2.8~12mm MP Varifocal Lens (ICR)
- H.264 / 30 IR LED
- ICR Auto Switch, True Day & Night
- 20 ~ 30m IR Night View Distance
- 3D DNR, Digital WDR
- Support Corridor Pattern
- ROI Coding
- PoE (Power over Ethernet) Power Supply
- Support Smartphone, iPad, Remote Monitoring
- Support P2P / Triple Streams
- Weatherproof (IP66)
- DC 12V / White Casing



## DIMENSION

\* Unit : mm (Inch)

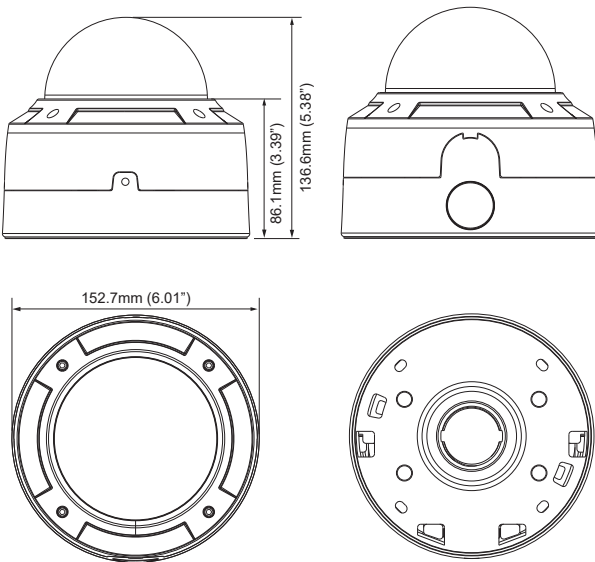

## SPECIFICATION

DESCRIPTION	AVC-VN91VLT
Image Sensor	1/3" CMOS
Image Size	1920 x 1080
Electronic Shutter	1/25s ~ 1/100000s
Min. Illumination	0 lux (IR LED ON)
Lens	2.8~12mm MP Varifocal Lens (ICR)
Lens Mount	CS / ø14
Video Compression	H.264 / MJPEG
Resolution	1080P (1920 x 1080), 720P (1280 x 720), D1, CIF, 480 x 240
Multi-Stream	1920 x 1080 (1 ~ 30fps) / 1280 x 720 (1 ~ 30fps) / 1280 x 720 (1 ~ 10fps) / D1 (1 ~ 30fps) / CIF (1 ~ 30fps) / 480 x 240 (1 ~ 30fps)
Bit Rate	64 Kbps ~ 8 Mbps
Encode Mode	VBR / CBR
Quality	Five levels under VBR; Freely adjustable under CBR
Image Setting	Corridor pattern, Saturation, Brightness, Chroma, Contrast, Wide Dynamic, Sharpen, NR, etc. adjustable through client software or web browser
Remote Monitoring	IE Browsing, CMS Remote Control
Online Connection	Support simultaneous monitoring for up to 6 users; Support multi-stream real time transmission
Protocol	TCP / IP, UDP, DHCP, NTP, RTSP, PPPoE, DDNS, Protocol SMTP, FTP
Storage	Network Remote Storage
Smart Alarm	Motion Alarm
Day & Night	True
PoE	Yes
IR Distance	20 ~ 30m
Weatherproof	IP66
Network	RJ45
Audio	No
Storage Card	Support TF card, Max. capacity is 64GB
Power Supply	DC 12V / PoE
Power Consumption	-22°F ~ 140°F (-30°C ~ 60°C), 10% ~ 90% Relative Humidity
Dimensions	ø150mm x 114mm (ø6.01" x 5.38")

## ACCESSORIES



AVM-DWMT-W

AVM-DPMT-EV1

AVM-P-CMT

AVM-P-PMT

AVM-DDMT-W-V2