

AVC-ETA51FT(-W)

5MP HD-TVI/CVI/AHD/ANALOG WEATHERPROOF EYEBALL CAMERA

HD-TVI
CAMERA




FUNCTION

- 5MP High Resolution, True Color Real Time Video
- HD-TVI/AHD/CVI Lossless Video Output Format
- Up to 1500 TVL Resolution
- CMOS Progressive Scan Image Sensor
- Supports OSD Menu (Control over Coax)
- Long Distance Transmission (Up to 1500ft.)
- Automatic switch from Color to B/W at Low Illumination Levels
- True Day/Night ICR
- Supports Noise Reduction Function
- Up to 65ft. IR Night Viewing Distance
- IP66 Ingress Protection
- Supports CoC (Control over Coax)




DIMENSION

Unit :mm (Inch)

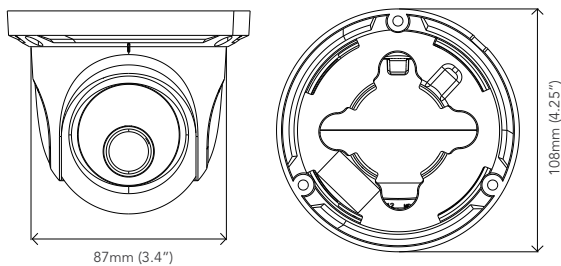

CONNECTION

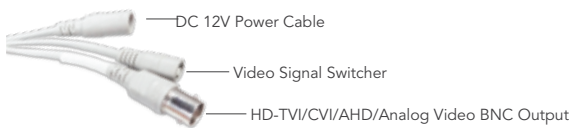

4-in-1 HD over Coax Technology delivers clear HD video up to 5MP (2592x1944) resolution and supports various of high definition video formats (HD-TVI/CVI/AHD/Analog)

- HD-TVI/CVI/AHD/Analog Video BNC Output
- Video Signal Switcher
- DC 12V Power Cable

SPECIFICATION

Description	NTSC	PAL
Image Sensor	1/2.5" CMOS	
Resolution	5MP	
Image Size	2592 X 1944	
Video Output	HD-TVI / CVI / AHD / ANALOG	
Image System	PAL / NTSC	
Electronic Shutter	AUTO; 1 / 25S ~ 1 / 100000S (PAL); 1 / 30S ~ 1 / 100000S (NTSC)	
IR Distance	65ft. (20m)	
Frame Rate	20fps	
Min. Illumination	Color : 0.001 lux@F1.2, AGC ON; B/W : 0 lux with IR	
Lens	3.6mm	
Lens Mount	M12	
S/N Ratio	≥52dB (AGC OFF)	
Ingress Protection	IP66	
Function Control	OSD (COX Control)	
Day & Night	ICR	
Digital WDR	Yes	
Digital NR	Yes (2D DNR)	
AGC	Yes	
Auto White Balance	Yes	
BLC	Yes	
Edge Brightness Compensation	Yes	
Defogging	Yes	
HLC	Yes	
Sharpness	Yes	
Mirror Image	Yes	
Smart IR	Yes	
Image Setting	Yes	
Defect Correction	Auto/Manual	
Language	Support for 13 different languages	
Angle Adjustment	Any Angle	
Power Supply	DC12V (± 10%)	
Power Consumption	IR OFF : < 1W; IR ON : < 3W	
Working Environment	- 20 °C ~ 50 °C, 10 % ~ 90 % (Relative Humidity)	
Dimensions (mm)	-Ø3.42" × 8.62" (87mm × 219mm)	